

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 26

Township: 8 North



Range: 1 East

Corner ID: SaCr S-19

Monument Description & Remarks: 3" Metal Pipe with cap. Survey Sign 3ft A.G. at Pt. (B).

References On File: Legal Survey Book 2 page no. 47 survey (1874), & page no. 261-262 survey (1877) on file in Surveyors office; Bledsoe Tapp & Riggert., Inc. survey, U.S.D.A Forest Service (2003), on file in Surveyors office & Recorders office (Inst# 2003003392).

RECOVERY TIE DRAWING
Field Book 38 Page No. 9

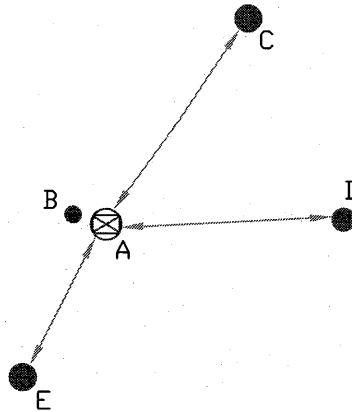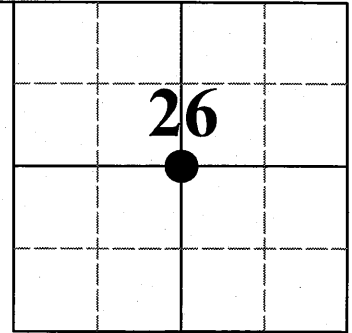


- A - 3" Metal Pipe with cap.
- B - North 0.60ft to Survey Sign on Metal Post.
- C - N 50° E 20.25' to Sign on 14" Chinquipin Oak.
- D - N 88° E 16.09' to Sign on 10" Chinquipin Oak.
- E - S 16° W 5.88' to Sign on 10" Chinquipin Oak.



Not To Scale
Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 11 of the Indiana Code; and the above data is given under my hand and seal this 4th day of April, 2006.

Handwritten signature of Kevin P. Enright in black ink.

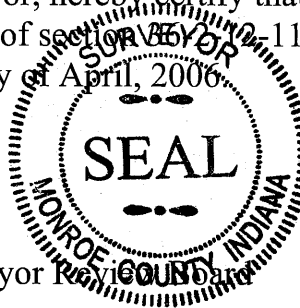

Administered by the Monroe County Surveyor

Date: 6/16/2006

Range 3 N Section 26 2nd P.M.

EXISTING SURVEYS

Original Government Survey

Original Survey Evidence Found

Year Surveyed:	NONE			By:		Date of Search:		By:	
Original Monument:						Monument Found:			
Species	Diameter	Bearing	Distance	Species	Diameter	Bearing	Distance		

Subsequent Corner Restoration


Evidence of Subsequent Corner Restoration Found

Where Filed or Recorded: MAHAROE County Survey Book 2
Book: 2 Page: 261-262 Date: 1877
Monument Set: STONE marked CEN 26T8RIE

Year 2002 By: E.D.
Searched: Fd. stone 8"x6"x12" split in two.
Monument stone has "4" on top, "C" on S. face
Found and horiz. scribed lines with illegible scribing on N. face,


Species	Diameter	Bearing	Distance	Species	Diameter	Bearing	Distance
RED OAK	3? or 8?	S 31° W	2 1/4 L = 1.48'	NONE			
W. OAK	2 1/2	N 32° E	40 L = 26.4'				

OTHER EVIDENCE

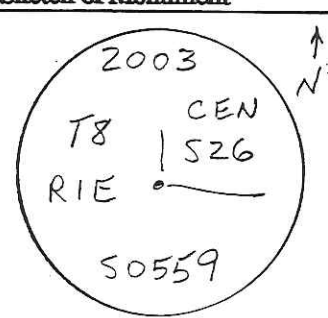Describe corner loc. relative to nearby features & dir. to corner location, note fences, roads, etc.	Sketch of Monument
1877 STONE = INCORRECTLY SET per Field notes in M.C. Survey Book 2, pages 261-262. STONE Fd. N 30-12-18 E, 16.30' From center of section 5/8" rebar with LUDWIG cap, 8" tall Fd. N 83-03-00 E, 100.82' From center of section	

PERPETUATION RECORD

Monument: Describe new monument set or work done to perpetuate/preserve the existing monument/position.
set 3" cap on aluminum post 2" tall in rock pile
Jan. 22, 2003
set survey marker post

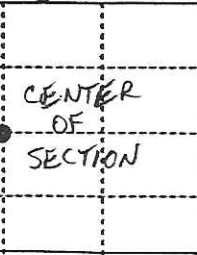Corner Diagram	Accessories: Describe new BTs & witness objects established to perpetuate existing evidence.		
	14" Chestnut Oak	N 41° E, 20.6'	blazed, scribed
	10" " "	N 77° E, 16.2'	" "
	" " "	S 10° W, 6.2'	" " painted red
	Corner Recordation:		Certificate Prepared: E.D.
	Filed and Recorded in County records:		Date: 2003
	Book:		Page:
Section: 26	Geodetic Coordinates:		Lat./N. 39° 05' 54.249"
	Edited By: BTR		Long./E. 86° 22' 42.3150"
			Date Created: 2/2003